



MAX

IDROPULTRICI PROFESSIONALI AD ACQUA FREDDA
PROFESSIONAL COLD WATER HIGH PRESSURE CLEANERS

MAX - IDROPULITRICI PROFESSIONALI AD ACQUA FREDDA PROFESSIONAL COLD WATER HIGH PRESSURE CLEANERS

- Pompe a bielle con pistoni in ceramica e testata in ottone
- Motori a 1450 rpm
- Motore ad alto rendimento
- Sistema di protezione dell'accoppiamento alberi motore-pompa (SJ)
- Protezione termica del motore
- Total stop ritardato (TSD)
- Struttura verniciata con copertura in acciaio inox AISI 430
- 2 ruote da 300 mm + 1 ruota da 125 mm
- Freno di stazionamento a pedale
- Triplex plunger pump with ceramic pistons and brass head
- 1450 rpm motor
- High efficiency motor with double thermal protection
- Motor/pump coupling protection with special lubricant retention system (SJ)
- Delayed total stop (TSD)
- Powder coated Metal Frame with AISI 430 cover
- Heavy duty 300 mm wheels and 1 for 125 mm
- Parking brake pedal


ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES

	N°	MOD.	COD.	DESCRIZIONE
	1	Tutti - All	01AC418	Idropistola con Semilancia (in M22 out M22) Spray gun with Semilance (in M22 out M22)
	2	Tutti - All	01AC319	Lancia INOX l=50 cm (in M22 out 1/4" F) Stainless steel lance l=50 cm (in M22 out 1/4" F)
	3	180/18 200/15 160/21	150307 150284 150286	Ugello - Nozzle 1/4" M 2506 Ugello - Nozzle 1/4" M 25045 Ugello - Nozzle 1/4" M 25075
	4	Tutti - All	01AC401	Tubo A.P. l=10 m R1 - 5/16" M22 - M22 H.P. hose l=10 m R1 - 5/16" M22 - M22
	5	Tutti - All	B.RCVR00170	Portagomma innesto rapido 1/2" - Hose connector
	6	Tutti - All	B.RCVR00169	Presca portagomma 3/4" - Threaded tap adaptor

ACCESSORI A RICHIESTA / ACCESSORIES ON DEMAND

AVVOLGITUBO IN ACCIAIO INOX AISI 304 - L. MAX = 20 m STAINLESS STEEL AISI 304 HOSE REEL L. MAX = 20 m	KIT UGELLO STURATUBO RETRO NOZZLE KIT	KIT UGELLO ROTANTE TURBO TURBO NOZZLE KIT	KIT SABBIAIATURA SANDBLASTING KIT
			
Mod. Tutti - All Cod. 01AC518	Mod. Tutti - All (tubo - hose l= 15m) Cod. 01AC376	Mod. Tutti - All (lancia - lance l= 70cm) Cod. 01AC514	Mod. 200/15 (045) Cod. 01AC475*
	Mod. 200/15 ugello - nozzle (05) Cod. 01AC403	Mod. 200/15 ugello - nozzle (045) Cod. 01AC295	Mod. 180/18 - 160/21 (06) Cod. 01AC479*
	Mod. 180/18 ugello - nozzle (065) Cod. 01AC404	Mod. 180/18 ugello - nozzle (065) Cod. 01AC297	Mod. Tutti/All Ugello sabbia - sand nozzle (ricambio - spare part) Cod. 01AC480
	Mod. 160/21 ugello - nozzle (07) Cod. 01AC288	Mod. 160/21 ugello - nozzle (07) Cod. 01AC298	

* Ugello incluso nel kit - Nozzle included

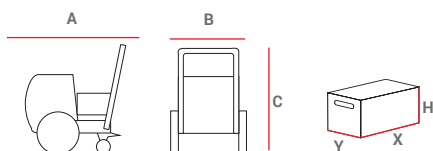

PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE					IMBALLO PACKAGING			
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MAX 180/18-200/15	730	460	770	71	800	400	500	79
MAX 160/21	730	460	770	74	800	400	500	83

		180/18	200/15	160/21
codice - code		● 01PF108	● 01PF109	● 01PF110
pressione max. - max. pressure	[bar] [MPa - psi]	180 18-2.600	200 20-2.900	160 16-2.300
portata max. - max. flow rate	[lt/h]	1.080	900	1.260
pompa - pump		IP47	IP47	IP47
sistema di arresto - stop system		TSD	TSD	TSD
rotazione pompa - pump speed	[rpm]	1.450	1.450	1.450
potenza assorbita max - max. absorbed power	[Kw]	7,2	7,2	7,2
alimentazione - supply voltage	[V - ph - Hz]	400-3-50	400-3-50	400-3-50
massima temp. aliment - max. inlet temp.	[°c]	40	40	40
quantità per pallet - pallet quantities	[pz - pcs]	9	9	9