



## Rek. tanddelning för rör och profiler

S (mm)	D (mm)										
	20	40	60	80	100	150	200	300	400	500	>700
2	10/14	10/14	10/14	10/14	10/14	10/14	10/14	10/14	8/12	8/12	6/10
3	10/14	10/14	10/14	8/12	8/12	8/12	6/10	6/10	6/10	6/10	6/10
4	10/14	10/14	10/14	8/12	8/12	6/10	6/10	5/8	5/8	4/6	4/6
5	10/14	10/14	10/14	8/12	6/10	6/10	5/8	4/6	4/6	4/6	4/6
6	10/14	10/14	8/12	8/12	6/10	5/8	5/8	4/6	4/6	4/6	4/6
8	10/14	8/12	6/10	6/10	6/10	5/8	5/8	4/6	4/6	4/6	4/6
10		6/10	6/10	5/8	5/8	4/6	4/6	4/6	4/6	3/4	3/4
12		6/10	5/8	4/6	4/6	4/6	4/6	3/4	3/4	3/4	3/4
15				4/6	4/6	3/4	3/4	3/4	3/4	2/3	2/3
20				4/6	4/6	3/4	3/4	3/4	3/4	2/3	2/3
30				3/4	3/4	3/4	2/3	2/3	2/3	2/3	1,4/2
50						2/32	2/3	2/3	2/3	1,4/2	1,4/2
80							2/3	1,4/2	1,4/2	1,4/2	1,1/3
100								1,4/2	1,4/2	1/1,30	0,75/1,25
150										0,75/1,25	0,75/1,25
>250										0,75/1,25	0,75/1,25

## Rek. tanddelning för homogena material

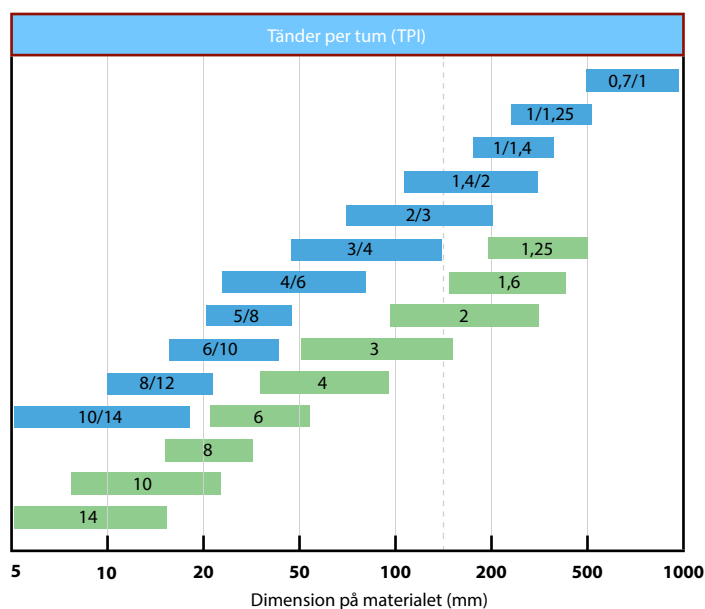

## Bandhastighet

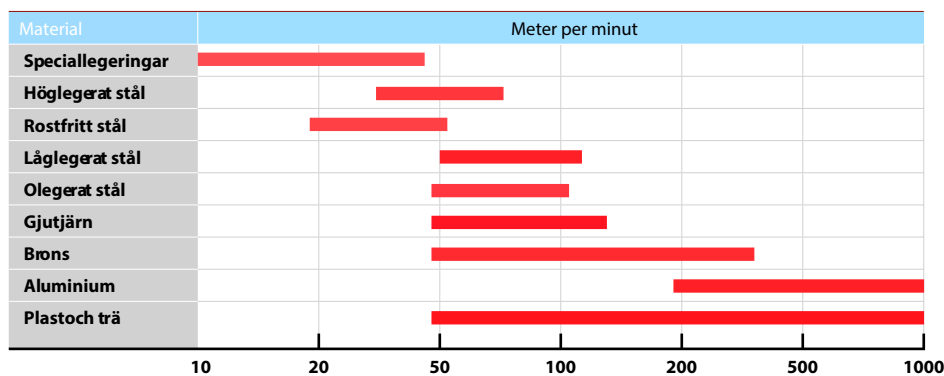

**LYOM**

Tel. 0510-53 00 28

info@lyom.com

www.lyom.com